


Type: DTS-70				Part No. DTS7032 ...		
Part No.	Installation Length L (mm)	Extension Length D (mm)	* Load per pair (kg)	DRILLING TABLE		
				Dimension A	Dimension B	Dimension C
DTS7032.040	400	400	470	50	---	200
DTS7032.045	450	450	460	50	---	250
DTS7032.050	500	500	450	50	---	300
DTS7032.055	550	550	440	50	---	350
DTS7032.060	600	600	430	50	---	400
DTS7032.065	650	650	420	50	200	---
DTS7032.070	700	700	410	50	225	---
DTS7032.075	750	750	400	50	250	---
DTS7032.080	800	800	390	50	275	---
DTS7032.085	850	850	380	50	300	---
DTS7032.090	900	900	370	50	325	---
DTS7032.095	950	950	360	50	350	---
DTS7032.100	1000	1000	350	50	375	---
DTS7032.105	1050	1050	340	50	400	---
DTS7032.110	1100	1100	330	50	425	---
DTS7032.115	1150	1150	320	50	450	---
DTS7032.120	1200	1200	310	50	475	---
DTS7032.125	1250	1250	300	50	500	---
DTS7032.130	1300	1300	290	50	525	---
DTS7032.135	1350	1350	280	50	550	---
DTS7032.140	1400	1400	270	50	575	---
DTS7032.145	1450	1450	260	50	600	---
DTS7032.150	1500	1500	250	50	625	---
DTS7032.155	1550	1550	240	50	650	---
DTS7032.160	1600	1600	230	50	675	---
DTS7032.165	1650	1650	220	50	700	---
DTS7032.170	1700	1700	210	100	650	---
DTS7032.175	1750	1750	200	100	675	---
DTS7032.180	1800	1800	190	100	700	---
DTS7032.185	1850	1850	180	100	725	---
DTS7032.190	1900	1900	170	100	750	---
DTS7032.195	1950	1950	160	100	775	---
DTS7032.200	2000	2000	150	100	800	---

* The maximum safe load is given for a fully extended pair of slides, mounted on the major axis, with a load spread uniformly along the inner beam

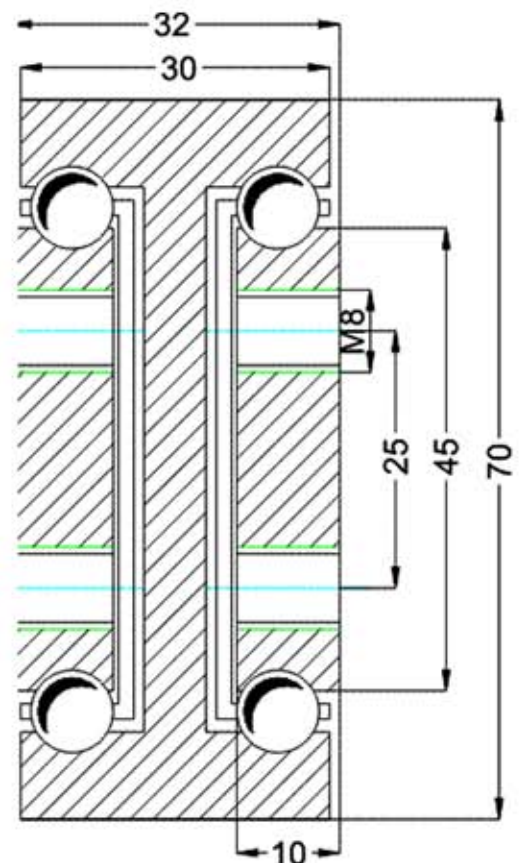

WE RECOMMEND USE ON THE MAJOR AXIS
DO NOT DISMANTLE THE SLIDE!!!

Options:

Various dimensions of the main profile, optional slide lengths, extensions, drillings, diameters and hole centers to customer's requirement.