


Type: DTBS-40			Part No. DTSB4024 ...			
Part No.	Installation Length L (mm)	Extension Length D (mm)	* Load per pair (kg)	DRILLING TABLE		
				Dimension A	Dimension B	Dimension C
DTSB4024.020	200	200	250	50	---	---
DTSB4024.025	250	250	245	50	---	50
DTSB4024.030	300	300	240	50	---	100
DTSB4024.035	350	350	235	50	---	150
DTSB4024.040	400	400	230	50	---	200
DTSB4024.045	450	450	225	50	---	250
DTSB4024.050	500	500	220	50	---	300
DTSB4024.055	550	550	210	50	150	---
DTSB4024.060	600	600	205	50	175	---
DTSB4024.065	650	650	200	50	200	---
DTSB4024.070	700	700	195	50	225	---
DTSB4024.075	750	750	190	50	250	---
DTSB4024.080	800	800	180	50	275	---
DTSB4024.085	850	850	170	50	300	---
DTSB4024.090	900	900	160	50	325	---
DTSB4024.095	950	950	150	50	350	---
DTSB4024.100	1000	1000	140	50	375	---
DTSB4024.105	1050	1050	130	50	400	---
DTSB4024.110	1100	1100	120	50	425	---
DTSB4024.115	1150	1150	110	50	450	---
DTSB4024.120	1200	1200	100	50	475	---

* The maximum safe load is given for a fully extended pair of slides, mounted on the major axis, with a load spread uniformly along the inner beam

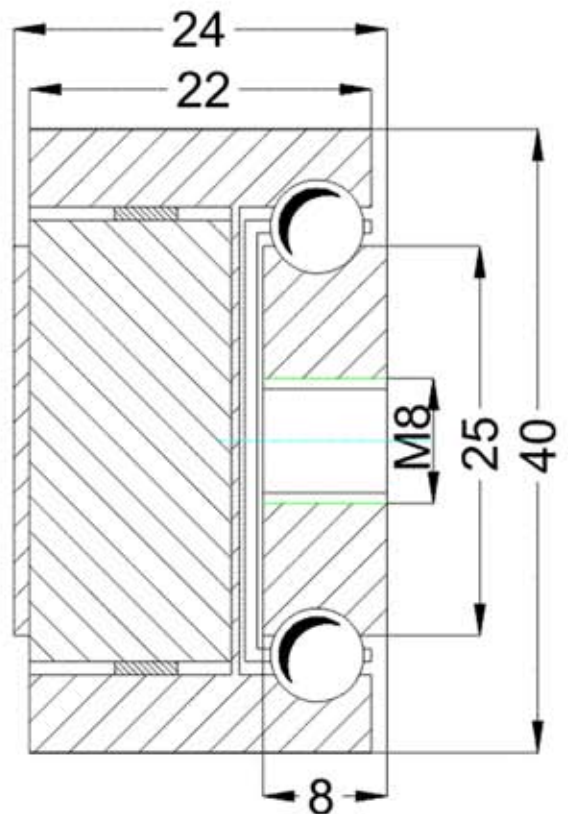

WE RECOMMEND USE ON THE MAJOR AXIS
DO NOT DISMANTLE THE SLIDE!!!

Options:

Various dimensions of the main profile, optional slide lengths, extensions, drillings, diameters and hole centers to customer's requirement.