


Type: DTSB-50			Part No. DTSB5030 ...			
Part No.	Installation Length L (mm)	Extension Length D (mm)	* Load per pair (kg)	DRILLING TABLE		
				Dimension A	Dimension B	Dimension C
DTSB5030.030	300	300	370	50	---	100
DTSB5030.035	350	350	360	50	---	150
DTSB5030.040	400	400	350	50	---	200
DTSB5030.045	450	450	340	50	---	250
DTSB5030.050	500	500	330	50	---	300
DTSB5030.055	550	550	320	50	150	---
DTSB5030.060	600	600	310	50	175	---
DTSB5030.065	650	650	300	50	200	---
DTSB5030.070	700	700	290	50	225	---
DTSB5030.075	750	750	280	50	250	---
DTSB5030.080	800	800	270	50	275	---
DTSB5030.085	850	850	260	50	300	---
DTSB5030.090	900	900	250	50	325	---
DTSB5030.095	950	950	240	50	350	---
DTSB5030.100	1000	1000	230	50	375	---
DTSB5030.105	1050	1050	220	50	400	---
DTSB5030.110	1100	1100	210	50	425	---
DTSB5030.115	1150	1150	205	50	450	---
DTSB5030.120	1200	1200	200	50	475	---
DTSB5030.125	1250	1250	195	50	500	---
DTSB5030.130	1300	1300	190	50	525	---
DTSB5030.135	1350	1350	185	50	550	---
DTSB5030.140	1400	1400	180	50	575	---
DTSB5030.145	1450	1450	170	50	600	---
DTSB5030.150	1500	1500	160	50	625	---
DTSB5030.155	1550	1550	150	50	650	---
DTSB5030.160	1600	1600	140	50	675	---

\* The maximum safe load is given for a fully extended pair of slides, mounted on the major axis, with a load spread uniformly along the inner beam

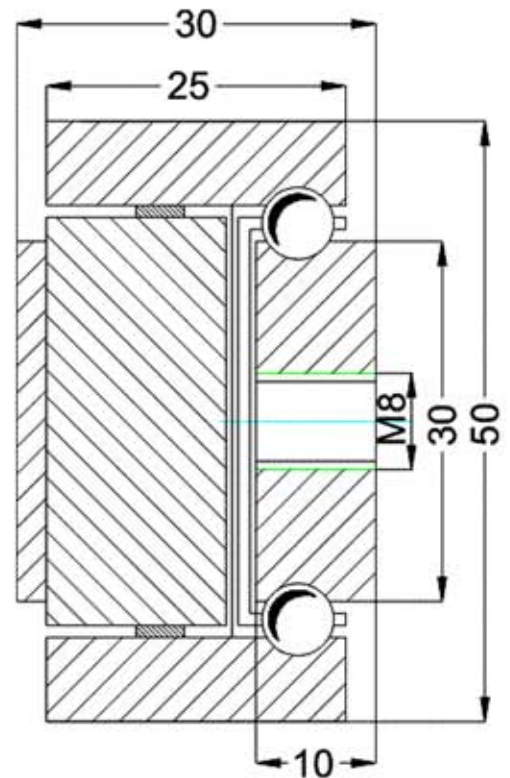

WE RECOMMEND USE ON THE MAJOR AXIS  
DO NOT DISMANTLE THE SLIDE!!!

**Options:**

Various dimensions of the main profile, optional slide lengths, extensions, drillings, diameters and hole centers to customer's requirement.