


Type: OWS-70				Part No. OWS7021 ...		
Part No.	Installation Length L (mm)	Extension Length D (mm)	* Load per pair (kg)	DRILLING TABLE		
				Dimension A	Dimension B	Dimension C
OWS7021.040	400	200	500	50	---	200
OWS7021.045	450	225	490	50	---	250
OWS7021.050	500	250	480	50	---	300
OWS7021.055	550	275	470	50	---	350
OWS7021.060	600	300	460	50	---	400
OWS7021.065	650	325	450	50	200	---
OWS7021.070	700	350	440	50	225	---
OWS7021.075	750	375	440	50	250	---
OWS7021.080	800	400	420	50	275	---
OWS7021.085	850	425	410	50	300	---
OWS7021.090	900	450	400	50	325	---
OWS7021.095	950	475	390	50	350	---
OWS7021.100	1000	500	380	50	375	---
OWS7021.105	1050	525	370	50	400	---
OWS7021.110	1100	550	360	50	425	---
OWS7021.115	1150	575	350	50	450	---
OWS7021.120	1200	600	340	50	475	---
OWS7021.125	1250	625	330	50	500	---
OWS7021.130	1300	650	320	50	525	---
OWS7021.135	1350	675	310	50	550	---
OWS7021.140	1400	700	300	50	575	---
OWS7021.145	1450	725	290	50	600	---
OWS7021.150	1500	750	280	50	625	---
OWS7021.155	1550	775	270	50	650	---
OWS7021.160	1600	800	260	50	675	---
OWS7021.165	1650	825	250	50	700	---
OWS7021.170	1700	850	240	100	650	---
OWS7021.175	1750	875	230	100	675	---
OWS7021.180	1800	900	220	100	700	---
OWS7021.185	1850	925	210	100	725	---
OWS7021.190	1900	950	200	100	750	---
OWS7021.195	1950	975	190	100	775	---
OWS7021.200	2000	1000	180	100	800	---

\* The maximum safe load is given for a fully extended pair of slides, mounted on the major axis, with a load spread uniformly along the inner beam

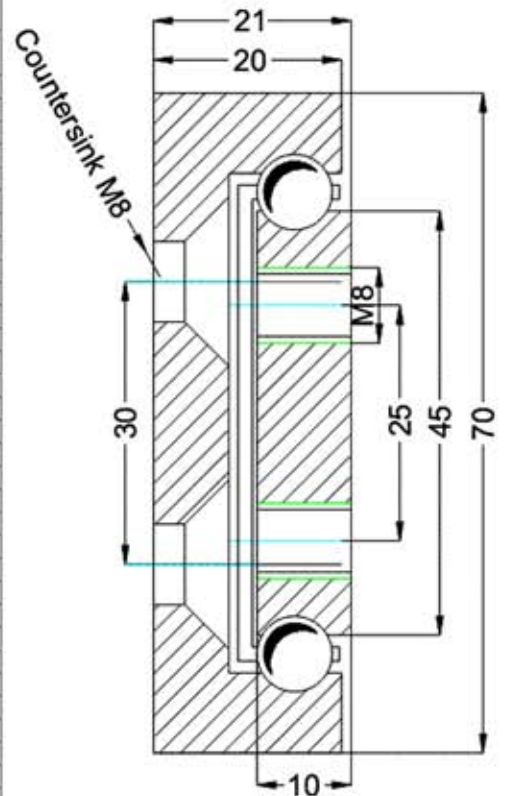

WE RECOMMEND USE ON THE MAJOR AXIS  
DO NOT DISMANTLE THE SLIDE!!!

**Options:**

Various dimensions of the main profile, optional slide lengths, extensions, drillings, diameters and hole centers to customer's requirement.