


Type: OWST-50			Part No. OWST5017 ...			
Part No.	Installation Length L (mm)	Extension Length D (mm)	* Load per pair (kg)	DRILLING TABLE		
				Dimension A	Dimension B	Dimension C
OWST5017.030	300	300	390	50	---	100
OWST5017.035	350	350	380	50	---	150
OWST5017.040	400	400	370	50	---	200
OWST5017.045	450	450	360	50	---	250
OWST5017.050	500	500	350	50	---	300
OWST5017.055	550	550	340	50	150	---
OWST5017.060	600	600	330	50	175	---
OWST5017.065	650	650	320	50	200	---
OWST5017.070	700	700	310	50	225	---
OWST5017.075	750	750	300	50	250	---
OWST5017.080	800	800	290	50	275	---
OWST5017.085	850	850	280	50	300	---
OWST5017.090	900	900	270	50	325	---
OWST5017.095	950	950	260	50	350	---
OWST5017.100	1000	1000	250	50	375	---
OWST5017.105	1050	1050	240	50	400	---
OWST5017.110	1100	1100	230	50	425	---
OWST5017.115	1150	1150	225	50	450	---
OWST5017.120	1200	1200	220	50	475	---
OWST5017.125	1250	1250	215	50	500	---
OWST5017.130	1300	1300	205	50	525	---
OWST5017.135	1350	1350	200	50	550	---
OWST5017.140	1400	1400	190	50	575	---
OWST5017.145	1450	1450	180	50	600	---
OWST5017.150	1500	1500	170	50	625	---
OWST5017.155	1550	1550	160	50	650	---
OWST5017.160	1600	1600	150	50	675	---

* The maximum safe load is given for a fully extended pair of slides, mounted on the major axis, with a load spread uniformly along the inner beam

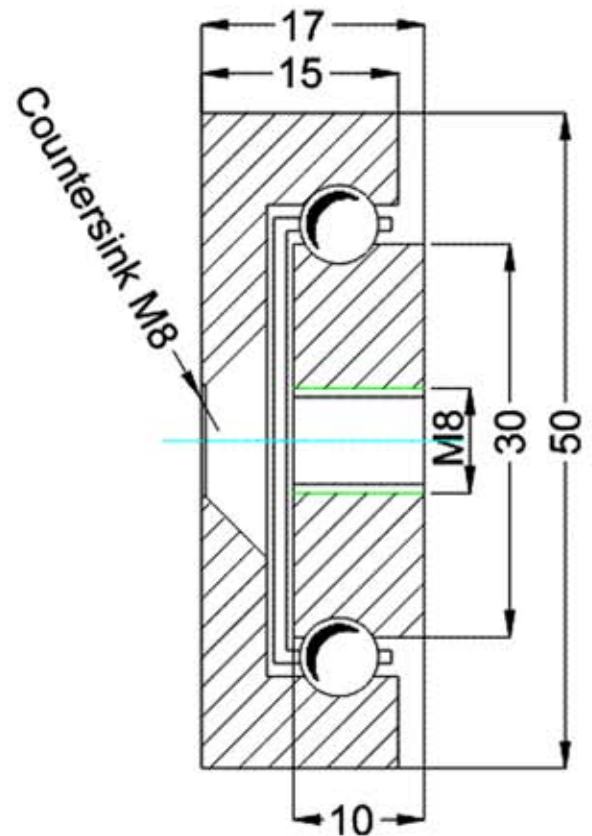

WE RECOMMEND USE ON THE MAJOR AXIS
DO NOT DISMANTLE THE SLIDE!!!

Options:

Various dimensions of the main profile, optional slide lengths, extensions, drillings, diameters and hole centers to customer's requirement.