


Type: STR-100			Part No. STR10020 ...			
Part No.	Installation Length L (mm)	Extension Length D (mm)	* Load per pair (kg)	DRILLING TABLE		
				Dimension A	Dimension B	Dimension C
STR10020.020	200	200	420	50	---	---
STR10020.025	250	250	410	50	---	50
STR10020.030	300	300	400	50	---	100
STR10020.035	350	350	390	50	---	150
STR10020.040	400	400	380	50	---	200
STR10020.045	450	450	370	50	---	250
STR10020.050	500	500	360	50	---	300
STR10020.055	550	550	350	50	150	---
STR10020.060	600	600	340	50	175	---
STR10020.065	650	650	330	50	200	---
STR10020.070	700	700	320	50	225	---
STR10020.075	750	750	310	50	250	---
STR10020.080	800	800	300	50	275	---
STR10020.085	850	850	290	50	300	---
STR10020.090	900	900	280	50	325	---
STR10020.095	950	950	270	50	350	---
STR10020.100	1000	1000	260	50	375	---
STR10020.105	1050	1050	250	50	400	---
STR10020.110	1100	1100	240	50	425	---
STR10020.115	1150	1150	235	50	450	---
STR10020.120	1200	1200	230	50	475	---
STR10020.125	1250	1250	225	50	500	---
STR10020.130	1300	1300	220	50	525	---
STR10020.135	1350	1350	215	50	550	---
STR10020.140	1400	1400	210	50	575	---
STR10020.145	1450	1450	200	50	600	---
STR10020.150	1500	1500	190	50	625	---
STR10020.155	1550	1550	180	50	650	---
STR10020.160	1600	1600	170	50	675	---

* The maximum safe load is given for a fully extended pair of slides, mounted on the major axis, with a load spread uniformly along the inner beam

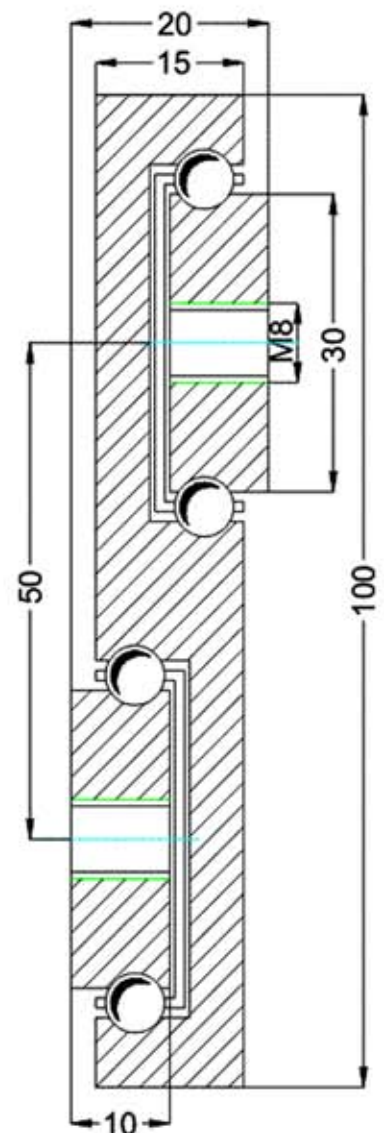

WE RECOMMEND USE ON THE MAJOR AXIS
DO NOT DISMANTLE THE SLIDE!!!

Options:

Various dimensions of the main profile, optional slide lengths, extensions, drillings, diameters and hole centers to customer's requirement.