


Type: STR-80			Part No. STR8017 ...			
Part No.	Installation Length L (mm)	Extension Length D (mm)	* Load per pair (kg)	DRILLING TABLE		
				Dimension A	Dimension B	Dimension C
STR8017.020	200	200	270	50	---	---
STR8017.025	250	250	265	50	---	50
STR8017.030	300	300	260	50	---	100
STR8017.035	350	350	255	50	---	150
STR8017.040	400	400	250	50	---	200
STR8017.045	450	450	245	50	---	250
STR8017.050	500	500	240	50	---	300
STR8017.055	550	550	230	50	150	---
STR8017.060	600	600	225	50	175	---
STR8017.065	650	650	220	50	200	---
STR8017.070	700	700	215	50	225	---
STR8017.075	750	750	210	50	250	---
STR8017.080	800	800	200	50	275	---
STR8017.085	850	850	190	50	300	---
STR8017.090	900	900	180	50	325	---
STR8017.095	950	950	170	50	350	---
STR8017.100	1000	1000	160	50	375	---
STR8017.105	1050	1050	150	50	400	---
STR8017.110	1100	1100	140	50	425	---
STR8017.115	1150	1150	130	50	450	---
STR8017.120	1200	1200	120	50	475	---

* The maximum safe load is given for a fully extended pair of slides, mounted on the major axis, with a load spread uniformly along the inner beam

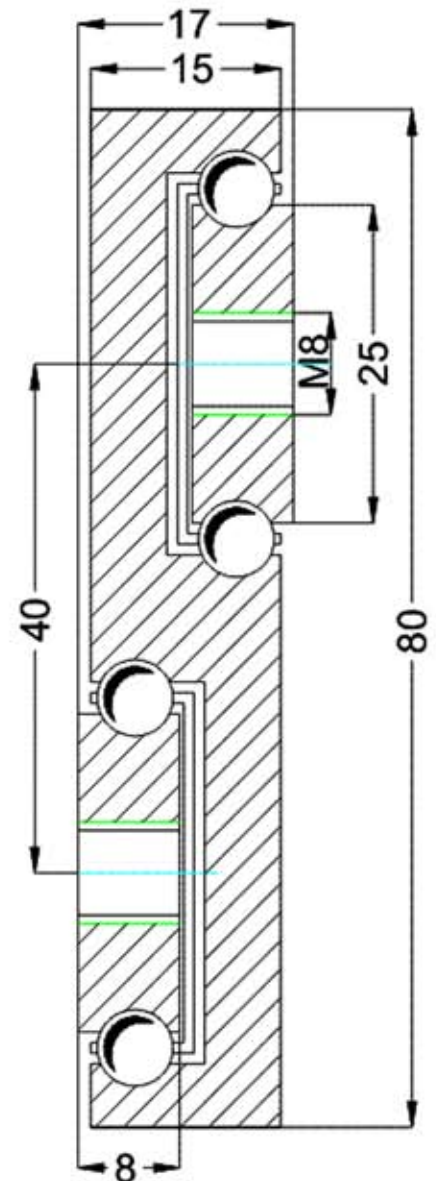

WE RECOMMEND USE ON THE MAJOR AXIS
DO NOT DISMANTLE THE SLIDE!!!

Options:

Various dimensions of the main profile, optional slide lengths, extensions, drillings, diameters and hole centers to customer's requirement.